


## Belt Conveyor Type 4080

Typical belt conveyor for transporting piece goods, boxes or bulk material over long distances.

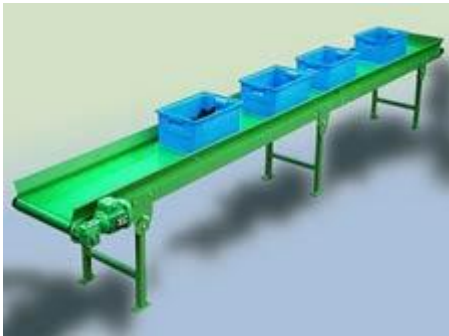

### Technical Data:

<b>Belt:</b>	Twin-laminate polyester, covered with polyurethane
<b>BeltWidth:</b>	100 mm up to 1200 mm
<b>Speed of Belt:</b>	0.1 m/sec. up to 1,0 m/sec
<b>Motor:</b>	Slip-on gear motor, 110V or 230 / 480V AC 60 Hz Shaft mounted on left side of conveyor. May also be mounted under the conveyor.
<b>Rollers:</b>	Ø 90 mm, made from aluminum alloy, drive roller rubber-covered
<b>Bearings:</b>	SKF self-aligning ball bearings, maintenance-free
<b>Frame:</b>	Steel construction, height 120 mm
<b>Side Guides:</b>	Steel sheets, 80 mm high
<b>Support Legs:</b>	Made from steel profiles, height and angle adjustable.